

AP-5715

Fanless Skylake / Kabylake
All-in-One POS System



AP-5515

Sleek and Stylish Fanless
All-in-One POS System



Model		AP-3515	AP-5515	AP-5815 AP-5715
Configuration				
Mainboard Model		TPM-6500-SE	TPM-6500-SE	TPM-6600-AA
CPU		Intel® Bay Trail-D Celeron® J1900 Quad Core (2M, up to 2.42 GHz)	Intel® Bay Trail-D Celeron® J1900 Quad Core (2M, up to 2.42 GHz)	Intel® 7th Generation Kabylake Intel® Celeron G3930TE (2M, 2.7 GHz) Intel® Core™ i3-7101TE (3M, 3.4 GHz) Intel® Core™ i5-7500T (6M, up to 3.3 GHz) Intel® Core™ i7-7700T (8M, up to 3.8 GHz) Intel® 6th Generation Skylake Intel® Celeron G3900TE (2M, 2.3 GHz) Intel® Core™ i3-6100TE (4M, 2.7 GHz) Intel® Core™ i5-6500TE (4M, up to 3.3 GHz) Intel® Core™ i7-6700TE (8M, up to 3.4 GHz)
Graphic		Intel® HD Graphics	Intel® HD Graphics (Z3700)	Intel® HD Graphics 530
Memory		up to 8G DDR3L	up to 8G DDR3L	up to 32GB DDR4
Storage (HDD/SSD/m-SATA)		1 x m-SATA or 1 x 2.5" HDD/SSD	1 x m-SATA or 1 x 2.5" HDD/SSD	1 x m-SATA or 2 x 2.5" HDD/SSD
Power Supply		DC+12V/60W for Main System DC+24V/60W for Thermal Printer	DC+12V/60W for Main System DC+24V/60W for Thermal Printer	DC+12V/90W for Main System DC+12V/150W (option: Power USB) DC+24V/60W for Thermal Printer
Panel	Size / Resolution	15" 1024x768	15" 1024x768	15" 1024x768
	Brightness (Typical)	300 nits	300 nits	300 nits
	Viewing Angle (Typical)	80° / 80° / 80° / 80°	80° / 80° / 80° / 80°	80° / 80° / 80° / 80°
Bezel Free	PCAP Touch	v	v	v
I/O Expansion				
I/O	COM 1/2	RI/ +5V/ +12V by BIOS	RI/ +5V/ +12V by BIOS	RI/ +5V/ +12V by BIOS
	COM 3/4	RI/ +5V/ +12V by BIOS	RI/ +5V/ +12V by BIOS	RI/ +5V/ +12V by Jump
	COM 5	Default +12V for VFD	Default +12V for LM20XX	x
	COM 6	x	Default +12V for VFD	Default +12V for VFD
	External USB	5*USB2.0/ 1*USB3.0	3*USB2.0/ 1*USB3.0	4*USB3.0/ 2*USB2.0
VGA Port		1	1	1 (Internal)
HDMI Port		x	x	1
LAN Port		1	1	2
RJ11 Cash Drawer		1	1	1
LPT Port		Optional	Optional	1
Audio Port	Line-out and Mic-in	x	x	1 (Line-out only)
	PS/2	x	x	x
DC-out / DC-in		v	v	v
Option	Power USB	x	x	Optional
	Intel AMT	x	x	v (i5 and i7 only)
Integrated Peripherals (Optional)				
MSR Type		v	v	v
i-Button		v	v	v
Barcode Scanner		x	v	v
2nd Display		VFD/8" / 10.4"	VFD/9.7" / 15"	VFD/9.7" / 15"
Wi-Fi		v	v	v
Thermal Printer		v	v	v
Others				
Operation System (OS)		Win 7/8.1/10.1/Linux	Win 7/8.1/10.1/Linux	Win 7/8.1/10.1/Linux
IP Rating		IP65 (Front Panel)	IP65 (Front Panel)	IP65 (Front Panel)
Color Plan		Black	Black/ White	Black/ White
Certification		CE/ FCC/ LVD	CE/ FCC/ LVD	CE/ FCC/ LVD
Weight		8.4 kg	8 kg	9 kg
Dimension (W x D x H mm)		355 x 238 x 430	355 x 257 x 440	355 x 257 x 440

TYSSO® FAMETECH INC.

Headquarter: 12F.-8, No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221, Taiwan

TEL: 886-2-86922060
FAX: 886-2-86922061
www.fametech.com.tw
info@fametech.com.tw



FAMETECH INC.
Your Reliable POS Solution Provider

All-in-One POS System AP SERIES

TYSSO



AP-5515

Sleek and Stylish Fanless All-in-One POS System



Curves on both front and back, distinctive and attractive look



Convenient to install and replace modular peripherals

Features

- Intel® Celeron® Bay Trail-D J1900 (up to 2.42 GHz)
- True-flat projected capacitive multi touch (PCAP) supported
- High performance with extremely low power consumption
- Fanless design with spill and dust resistant front panel (IP65 approved)
- Modular architecture with patented seamless housing design
- Rich external devices supported
- Unique cabling system (cables are hidden in the stand)

AP-5515 is an epochal POS system featuring all-in-one flexibility and modular concept. Its patented seamless housing design ensures easy maintenance, as the terminal itself is completely screw-less and requires no special tools to open, allowing fast and convenient service and upgrades. Its wide variety of modular peripherals also enable you to customize the POS system with just the features you need.



High Performance POS with Printer

- AP-5815/AP-5715 is a fanless POS System with flexibility to integrate receipt printers of your own choice like EPSON, Stars, etc. The aluminum die-casting back cover design provides an effective cooling solution for maximum heat dissipation. Equipped with the 6th and 7th generation Intel® Core processors, the AP-5815/AP-5715 can help you achieve a significant performance boost while maintaining a quiet operation.

AP-5815 | AP-5715

Features


- Ready for duty with 6th and 7th Generation Intel® processors
- Fanless design from Celeron all the way up to i7 Processor
- Latest DDR4 memory, SATA III maximized the access speed and efficiency
- Compatible with Intel iAMT (AP-5715 Plus i5 and i7)
- Slim, sealed, strong, easy maintenance and stylish design
- Rear cover aluminum die-casting construction for exceptional thermal dissipation
- IP65/NEMA 4 protection against falling dirt, dust and splashing water

AP-3515

15 Inches All-in-One POS System



Durable alloy space-saving base, ideal for situation where space is at a premium

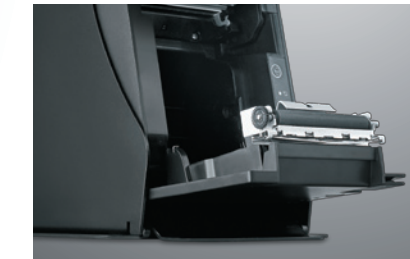

Comes with an embedded high-speed thermal receipt printer

Features

- Low power consumption Bay Trail Celeron J1900 (2.0 GHz)
- DDR3L RAM module (1~8G)
- 15 inch Full-Flat LCD monitor
- Touch Screen: 5 wire resistive or projective capacitive (Multi-Touch support)
- Embedded 80 mm 250 mm/sec high-speed thermal receipt printer
- Optional secondary display (8", 10.4" and 15" selectable)
- Modular MSR and i-Button
- Versatile I/O support: USB 2.0 / RS-232 / RJ-11 / RJ-45...etc.

AP-3515 is a cost-effective all-in-one POS system with an embedded, high speed 250 mm/sec receipt printer hidden in the robust and steady metal alloy base in order to save counter space and provide better functionality. Its rich I/O ports and versatile design allows it to be configured to meet specific requirements and business needs.

